


The HILLCUTTER Premium impresses with many technical refinements and its robustness. It achieves maximum stability with minimal weight. The adjustable wire height, depth limiters, riders and stops allow for quick and uninterrupted work.



Contents of Kit:

- Hillcutter Premium 1,350mm cut length, 330mm cut depth
- Corner Cutter
- Transport Case (18cm x 90cm x 65cm)
- Hot-wire

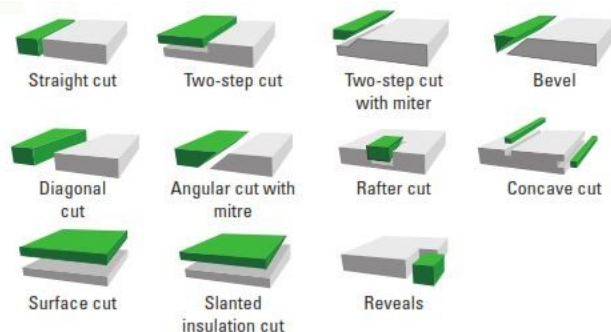

Ideal for cutting Styrofoam and similar insulating materials. Suitable for wall insulation, flat and pitched roof insulation and in between rafter insulation.

- Cut length: 1,350mm
- Cut depth: 330mm
- Slab support surface: 1,000mm
- Miter: 0-45 Grad
- Ruler: Millimeter-scale, adjustable with stop tab
- Stand: Integrated, adjustable in height and width
- Plug: Connection to the transformer via splash-proof XLR industrial plug
- Frame: Welded and powder-coated aluminium
- Bow: Powder-coated aluminium with ball-bearing rails
- Weight: 14 kg
- Transformer power with thermo-protection: 220-230V / 50-60 Hz / 37 V, 160 VA / IP 68 (waterproof)
- Dimensions: 95mm x 370mm x 1.720mm.

Advantages:

- Advanced construction achieves maximum stability with minimal weight.
- For transport, the device is reduced to a convenient size and stored in a slim case, which measures only 90cm x 65cm.
- This hot wire foam cutter masters all cutting variants. The adjustable wire height, depth limiters, riders and stops allow quick and uninterrupted work.
- Stainless steel joints, as well as the impact resistant and robust construction, equip the Alucutter Premium for tough construction site use.



- Space-saving storage and transport: The hot wire cutter can be pushed together to a compact size and then packed in a convenient case for transportation.
- Hot wire foam cutter for cutting out rafters: The corner is ideal for use in roof insulation with rigid foam slabs
- Hot wire foam cutter for slanted cuts: With the Hillcutter Premium, wedges can be cut along the length of the entire rigid foam slab.
- Sturdy despite minimum weight: The extendable stand (height and width adjustment) makes this hot wire foam cutter extremely stable.
- Scaffolding Bracket: A very robust and high-quality scaffolding bracket is used for easy mounting on the scaffold, reversible by 90 degrees.
- Side Supports: Wide side supports with both sides adjustable miter angle and scale.