

Virgin Nylon PA66 Cable Ties




High Quality Virgin Nylon 6,6 Cable Ties

These cable ties are ideal for identifying and bundling cables, hoses and pipes along with many more applications. They can be tightened by hand or by using one our tensioning tools.

Specifications:

- Material: Virgin Nylon PA66
- Low Smoke & Fume
- Colours available: Black & Natural
- Flamability Rating: UL 94 V-2
- Zero Halogen
- Work Temp: -40°C to 85°C
- UK Weather Resistant (Black)
- Feature: Non-Releasable

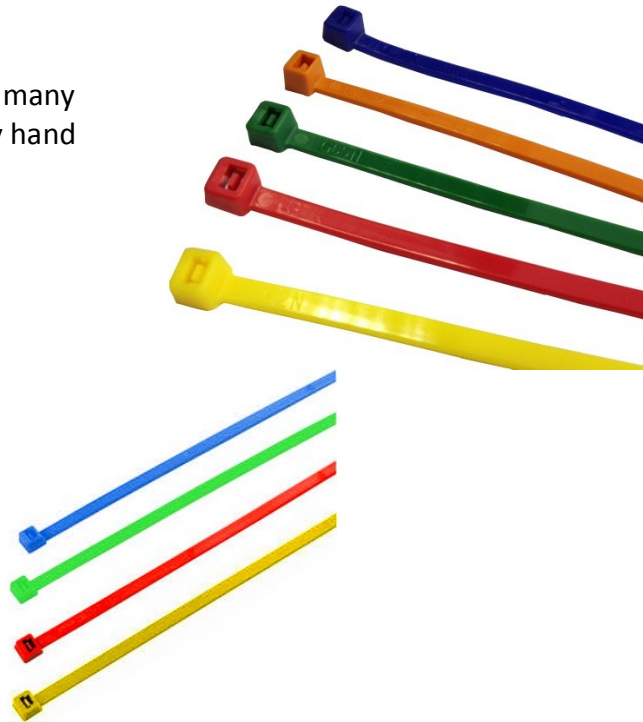

Nylon 66 – General purpose Nylon 66 is the material most frequently used for cable ties. This material meets UL 94V-2 flammability rating and has a working temperature range from -40 degrees F to 185 degrees F.

Hilltop can supply a vast range of cable ties for all kinds of applications. Also available printed. Please contact our sales team for further information

Length	Width	Bundle Dia	Tensile Strength	Ordering Description
mm (inch)	mm (inch)	mm (inch)	Kg (1lbs)	
100 (4.00)	2.5 (0.10)	22 (0.87)	8.1 (18)	HTP-TR1-100.0X2.5-colour code-PC
150 (5.91)	3.6 (0.14)	35 (1.38)	18.2 (40)	HTP-TR2-150.0X3.6-colour code-PC
160 (6.30)	4.8 (0.19)	38 (1.50)	22.2 (50)	HTP-TR3-160.0X4.8-colour code-PC
200 (7.87)	2.5 (0.10)	53 (2.09)	8.1 (18)	HTP-TR4-200.0X2.5-colour code-PC
200 (7.87)	4.8 (0.19)	50 (1.97)	22.2 (50)	HTP-TR5-200.0X4.8-colour code-PC
300 (11.81)	4.8 (0.19)	76 (2.99)	22.2 (50)	HTP-TR8-300.0X4.8-colour code-PC
300 (11.81)	7.6 (0.30)	76 (2.99)	53.3 (120)	HTP-TR9-300.0X7.6-colour code-PC
370 (14.57)	4.8 (0.19)	102 (4.02)	22.2 (50)	HTP-TR10-370.0X4.8-colour code-PC
580 (22.83)	12.7 (0.5)	170 (6.7)	111 (250)	HTP-TR13-580.0X12.7-colour code-PC
710 (27.9)	9.0 (0.35)	205 (8.0)	67 (150)	HTP-TR14-710.0X9.0-colour code-PC
530 (21.0)	9.0 (0.35)	150 (6.0)	67 (150)	HTP-TR16-530.0X9.0-colour code-PC
1030 (40.0)	12.7 (0.5)	300 (12.0)	111 (250)	HTP-TR18-1030.0X12.7-colour code-PC
1500 (59.0)	9.0 (0.35)	462 (18.1)	80 (176)	HTP-TR21N-1500.0X9.0-colour code-PC