


HKY– High Temp, Fluid Resistant, Extra Tough, Semi Rigid Heat Shrinkable Tubing

HKY is an extremely tough, high temperature, thin wall insulation tubing. This trans-parent, non-burning, semi-rigid tubing has superior resistance to most industrial fuel, solvents and chemicals.

Designed for applications requiring strain relief at high temperatures up to + 175°C, this products is unusually tough in its resistance to abrasion and cut through. Typical applications include high temperature applications, protection, strain relief, chemical resistance, mechanical and abrasion protection.

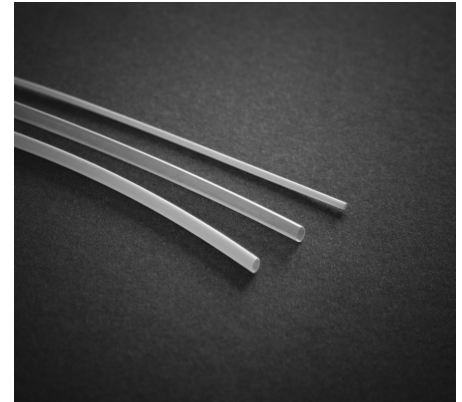

Inside Diameter		Wall Thickness		Standard Package	
Expanded as supplied (min)	Recovered after heating (max)	Total Wall recovered after heating (nom)	1.2 metre length quantity	Ordering Description	
mm	mm	mm	mtrs		
9.5	4.8	0.30	24	HKY-1.2/0.6-colour code-SP	
6.4	3.2	0.30	30	HKY-1.6/0.8-colour code-SP	
4.8	2.4	0.25	60	HKY-2.4/1.2-colour code-SP	
3.2	1.6	0.25	60	HKY-3.2/1.6-colour code-SP	
2.4	1.2	0.25	60	HKY-4.8/2.4-colour code-SP	
1.6	0.8	0.25	60	HKY-6.4/3.2-colour code-SP	
1.2	0.6	0.25	60	HKY-9.5/4.8-colour code-SP	
12.7	6.4	0.30	24	HKY-12.7/6.4-colour code-SP	
19.0	9.5	0.43	18	HKY-19.0/9.5-colour code-SP	
25.4	12.7	0.48	12	HKY-25.4/12.7-colour code-SP	

Specifications

Agency
Meets the requirements of:
UL 224 VW—1 150°C
CSA
SAE AMS-DTL—23053/8
VG 95343 Part 5 Type F
VDE 0341/Pt 9005
Bs 3G 1978 Part 4

Military
Mil-1-2305/8
Def Stan 59-97 Type 3
VG 95343 Part 5 Type F

Features & Benefits

UL 224 VW—1/CSA Approvals
Excellent Chemical Resistance
2:1 Shrink Ratio
Operating temperature range
–55°C + 175°C
Minimum shrink temperature
+ 155°C

The largest size that will recover snugly over the component to be covered should be ordered. The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage. Other lengths, size and non-standard colours may be available subject to special orders.

HKY– High Temp, Fluid Resistant, Extra Tough, Semi Rigid Heat Shrinkable Tubing

Test	Test Method	Typical Performance
Heat Ageing:	IEC 60684—2 clause 39 (168h at 200°C)	Tensile strength: 15 MPa (min) Elongation: 75% (min)
Corrosion Resistance:	IEC 60684—2 clause 33 (16h at 175°C)	No Corrosion of mirrors
Flame Propagation:	IEC 60684—2 clause 26 Method C	15s (max) Meets the requirements of UL 224 VW1
Fluid resistance:	IEC 60684—2 clause 36 Test Fluids:	Tensile strength 25 MPa (min) Ultimate elongation: 150% (min) Aircraft fuel to ISO1817 liquid F (70°) Phosphate ester ISO1817 liquid 103 (23°)

