

Conduit Sealed End Sleeve

Non-Metallic Systems

End Sleeve - ESN



Technical Characteristics

Conforms to	N/A		
Approvals and Standards	N/A		
Degree of mechanical protection	Low		
Degree of protection	IP54 - As standard at conduit interface		
UV protection	High		
Fitting Characteristics	Tapered rubber sealing system Black Only		
Application	To provide a neat conduit termination and limit ingress of dirt and liquids where a conduit fitting is not required. Large glamping range at exit. Can be secured with cable ties.		
Normal operating temperature range	Application	Min Temp	Max Temp
	Static	- 30°C	+120°C
	Dynamic	- 30°C	+120 °C (Use of Ty-Rap recommended)
For use with - Conduit Series	For use with all conduits in the Hilltop range		
Fire performance	Not rated		
Testing data	N/A		
Type of material	Polychloroprene Rubber		

Image



Conduit Sealed End Sleeve


Non-Metallic Systems

End Sleeve - ESN



Dimensional Data

Part No	Nominal Conduit Size	Dimensions mm	Outlet Diameter Range mm
	A	B	C
ESN12	12	28.0	4-8
ESN16	16	35.0	5-9
ESN20	20	42.0	7-14
ESN25	25	50.0	9-17
ESN28	28	50.0	14-22
ESN32	32	53.0	16-32
ESN40	40	56.0	16-32

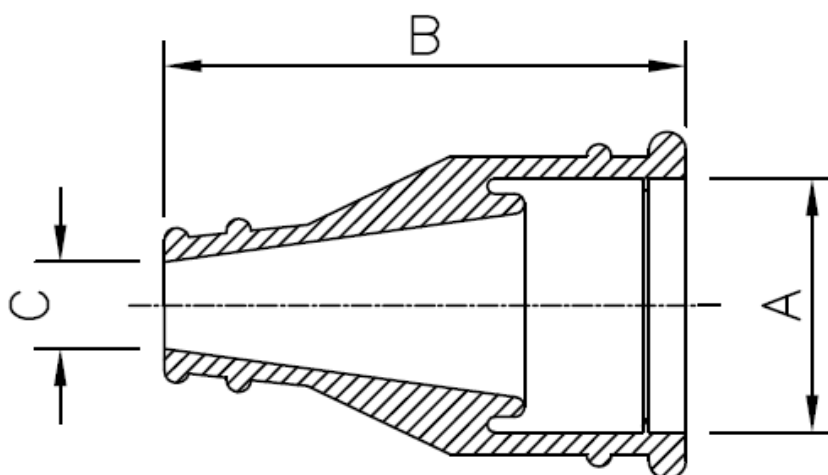

Conduit Sealed End Sleeve - HTP-ESN