

## Polyester non-heat Shrinkable Weaved Sleeving




Hilltop polyester non-heat shrinkable weave sleeving consist of polyester multifilament. With the particularly smooth inner wall, it could reduce the frictional resistance problems, and provides easy installation. The tight woven construction can provide chemical fluid resistance and noise reduction.

### Application



It is widely used to protect hydraulic pipes, rubber hose, plastic pipes and wire harnesses from damage. This kind of sleeving can also be used in industrial and construction fields where outstanding hose protections are needed.

### Drawing

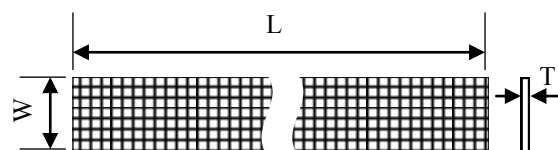

### Datasheet

Part No	Flat Width (W)	Round I.D.	Wall thickness (T)	Packing (L)
NSSP-025	25	15	1.1	100m/spool
NSSP-030	30	19	1.1	100m/spool
NSSP-040	40	25	1.1	50m/spool
NSSP-060	60	38	1.1	50m/spool
NSSP-070	75	47	1.1	50m/spool
NSSP-090	90	57	1.1	50m/spool
NSSP-115	115	70	1.1	50m/spool
NSSP-145	145	90	1.1	50m/spool
NSSP-176	176	110	1.1	50m/spool
NSSP-200	200	125	1.1	50m/spool

Unit: mm



### Technical Data

Material:	Polyester Multifilament
Operating Temperature:	-50°C ~ 150°C
Melting Point:	230°C
Flammability:	VW-1
Standard Colour:	Black
Cutting Tool:	Scissor and hot knife
Approval:	RoHS