


**High performance thick wall  
Heat-shrinkable tubing**

- High recovery ratio reducing the number of sizes and inventory costs
- UV stabilised material suitable for aerial and underground applications
- Used where maximum reliability is required, submersible, direct buried installations
- Internally coated with hot melt adhesive or mastic both giving high corrosion and mechanical performance
- Available in 5 standard lengths



## Sizing/ordering information

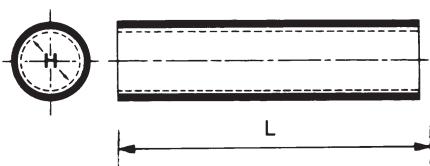

Description	H a (mm)	H b (mm)
XCSM 23/6	23	6
XCSM 30/8	30	8
XCSM 44/12	44	12
XCSM 55/18	55	18
XCSM 85/22	85	22
XCSM 115/30	115	30
XCSM 130/41	130	41
XCSM 160/55	160	55
XCSM 178/60	178	60


H a: as supplied

H b: after unrestricted recovery

Standard lengths: 250, 500, 750, 1000, 1500

## Ordering example

XCSM-85/22-1500/XX

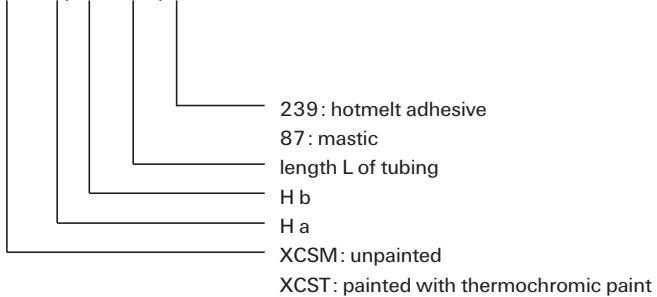

<https://www.hilltop-products.co.uk/>

Hilltop Products  
Kirkstead Way  
Golbourne, Warrington  
Cheshire  
Tel:01942 723101  
Email: sales@hilltop-products.co.uk

Tyco is a trademark

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.

*a vital part of your world*

© 2005 Tyco Electronics  
TC 049/DS/7 08/98