



PART AS SUPPLIED

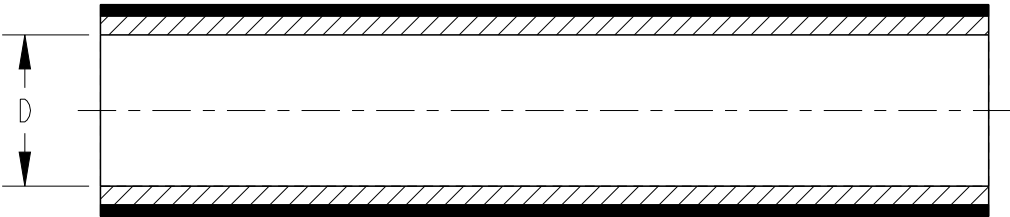

PART FULLY RECOVERED

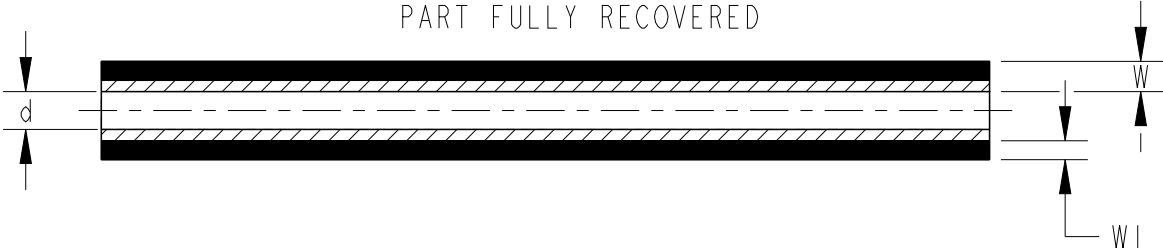

PRODUCT DIMENSIONS

SIZE	AS SUPPLIED		AS RECOVERED					
	MINIMUM EXPANDED I.D. (D)		MAXIMUM RECOVERED I.D. (d)		TOTAL WALL THICKNESS AFTER RECOVERY (W)		OUTER JACKET WALL THICKNESS AFTER RECOVERY (WI)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.
4/1	4.00	0.157	1.00	0.039	0.80±0.15	0.031±0.006	0.50±0.12	0.020±0.005
8/2	8.00	0.315	2.00	0.079	0.90±0.20	0.035±0.008	0.60±0.12	0.024±0.005
12/3	12.00	0.472	3.00	0.118	1.20±0.25	0.047±0.010	0.80±0.15	0.031±0.006
16/4	16.00	0.630	4.00	0.157	1.50±0.25	0.059±0.010	1.00±0.20	0.039±0.008

PRODUCT INFORMATION

1. NON-FLAME RETARDANT
2. OUTER JACKET: IRRADIATED MODIFIED POLYOLEFIN COLOUR: CLEAR
INNER LINER: HOT MELT ADHESIVE COLOUR: LIGHT AMBER
OTHER COLOURS ARE POSSIBLE BY SPECIAL CONTRACT
3. SHRINK RATIO: 4:1
4. LONGITUDINAL CHANGE 0 TO -15%
5. TUBING CUT TO SPECIFIC LENGTHS CAN BE SUPPLIED
FROM THE PRODUCT SIZES REFERENCED WITHIN THIS DRAWING



STANDARD CUTTING TOLERANCES(mm)	
CUT LENGTH	TOLERANCE
UPTO TO 9.90mm	±1.50mm
10mm TO 24.90mm	±1.50mm
25mm TO 54.90mm	±1.50mm
55mm TO 99.90mm	±3.00mm
100mm TO 149.90mm	±4.00mm
150mm TO 499.90mm	±5.00mm
500mm AND GREATER	±25.40mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm(Inches)

MATERIAL
SEE NOTE
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.1

2 PLC ±0.01

3 PLC ±0.001

4 PLC ±0.0001

ANGLES ±

FINISH -

DWN 16MAY2023
BASAVARAJA D A
CHK 16MAY2023
SELVAPANDIAN B
APVD 16MAY2023
MAYO BAKARE

PRODUCT SPEC
RK-6214
APPLICATION SPEC
-
WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
RPPM STANDARD SIZES
DUAL WALL SLEEVING

SIZE
A3

CAGE CODE
-

DRAWING NO
C-RPPM

RESTRICTED TO
-

SCALE
NTS

SHEET
1 OF 1

REV
A