


Harnessflex® Fast-Fit

Removal tool

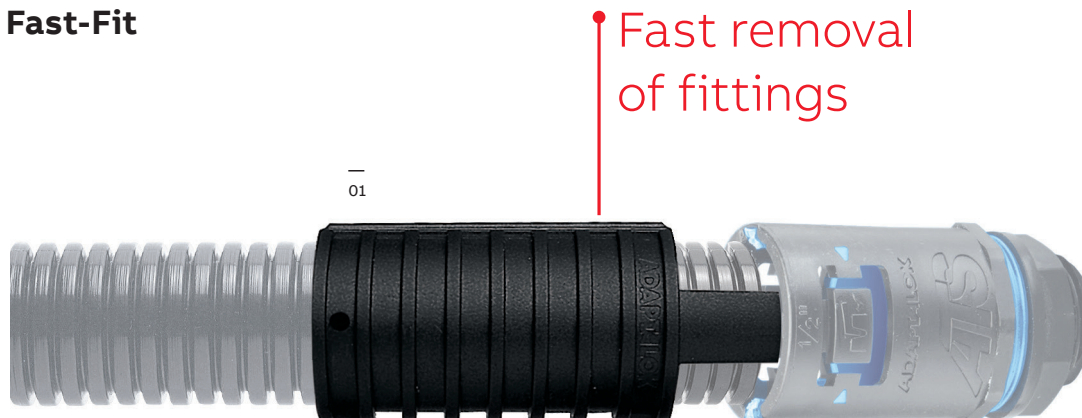

01 Harnessflex®
Fast-Fit removal tool.

The Harnessflex® Fast-Fit Removal tool for simple, safe removal of Fast-Fit fittings.

Instructions:


1. Slide removal tool over conduit
2. Align tabs with retention clips on fitting
3. Slide removal tool into fitting, pushing the tabs underneath the clips
4. Remove fitting from conduit

Features & benefits:


- Safe and simple removal and of Harnessflex Fast-Fit fittings

Material:

- Polyamide 6
- Black

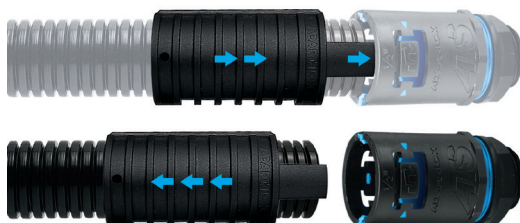

Harnessflex® Fast-Fit removal tool

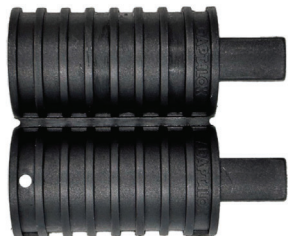	Part No.	Harnessflex Fast-Fit fitting size (mm)
	HTS12/RT	12
	HTS16/RT	16
	HTS20/RT	20
	HTS28/RT	28
	HTS32/RT	32
	HTS40/RT	40
	HTS50/RT	50