

PRODUCT OVERVIEW

# **Harnessflex® EVO™ Conduit Systems**

for safeguarding critical wiring in heavy-duty electric vehicles

***Harnessflex***  
SPECIALIST CONDUIT SYSTEMS





**Harnessflex®  
EVO™**


(Electric Vehicle Orange) specialist range for full EV (electric vehicle) industry compliance.



## Harnessflex® EVO™

(Electric Vehicle Orange) conduit systems

Electric Vehicle Orange (EVO™) conduit systems for safeguarding critical wiring in heavy-duty electric vehicles.

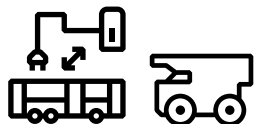

Harnessflex EVO™ (Electric Vehicle Orange) conduit is flexible nylon (PA6) conduit suitable for electric vehicle applications.

### Heavy automotive cable protection systems

Protection from damage by mechanical abrasion, excessive cable strain, corrosive salts and liquid ingress.

Built for use in a wide range of EV applications Including electric cars, buses, trucks, lorries, trams and trains.


### High voltage connectors

Connectors that easily integrate into high and low voltage wiring and are proven to withstand abrasion, stress, vibration, corrosive conditions and higher vehicle running temperatures. Testing – Form, Fit and Function.


—  
01 Co-Polyester (CPC) dynamic conduit.

—  
02 Nylon (PA6 - NC and CTPA) conduit.

—  
01

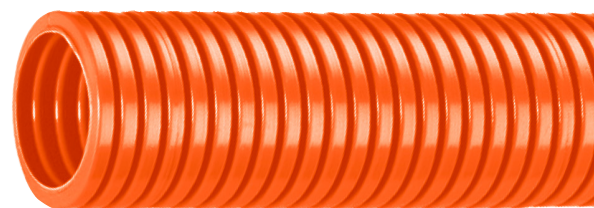


—  
02

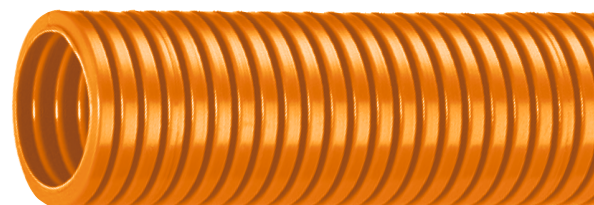

### Reliable complete system integration for EV wiring protection

Featuring our signature vibration friendly profile (VFP) as standard, as well as UV and heat stabilisation as standard, Harnessflex EVO™ conduit systems minimise the risk of electrical failure whilst also protecting crucial HV connectors.

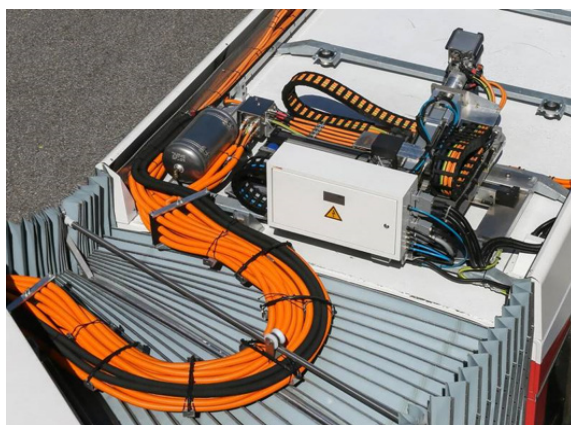

# Harnessflex®


## Conduit systems

Harnessflex® conduit systems are built for performance, designed to protect critical wiring in harnesses on HGVs, off-road vehicles and other heavy automotives.

— 01 Light, Medium and Standard weight flexible conduit for a wide range of wiring harness applications and environments.

Harnessflex® has the largest range of flexible conduits, sealed fittings, hinged connector interfaces and Y&T pieces, anywhere in the global cable protection market. Constantly evolving through innovation driven by some of the most demanding automotive industry sectors, Harnessflex products are designed to be used together as a system for easy installation and complete wiring harness protection.

Featuring a unique vibration friendly profile (VFP) as standard, as well as UV and heat stabilisation as standard, Harnessflex® conduit systems provide 10-150% greater life expectancy in dynamic or vibrating applications, when compared with other products. This maximises the productivity of the system being protected, whilst minimising the risk of electrical failure.



From fit-and-forget CPC conduit systems offering unbeatable dynamic performance, to our X-Temp™ range that is designed and tested to withstand extreme temperatures, Harnessflex® can provide a solution for most applications and environments.

### Features & benefits:

- High flexibility and fatigue life - continuous performance over a long product lifespan
- Protects critical cables with very high abrasion, impact and shock resistance
- Specialist ranges for use in extreme high and low temperatures
- Range includes products with IP40-IP69 rating, as well as self-extinguishing and low fire hazard capabilities and fittings offering reduction options
- VFP as standard, delivering minimal cable abrasion
- Designed to maximise tensile strength and reduce together with all Harnessflex® connector interface, Y&T and joining system installations
- 100% inspected and tested



### Harnessflex® Standard

A comprehensive range of cable protection products for heavy automotive 12V and 24V systems.



### Harnessflex® X-Temp™

Protection at temperatures between 200°C to -50°C with high vibration, dynamic conditions.




### Harnessflex® EVO™

(Electric Vehicle Orange) specialist range for full EV (electric vehicle) industry compliance.



## Product selection guide

### EVO™ conduit systems



#### Product selection guide

Type	NC	CTPA	CPC
Conduit material	Polyamide 6	Polyamide 6	Co-Polyester
Conduit weight	Standard	Light	Medium
Slit version available	•	•	–
<b>Temperature range</b>			
Long term static min.	-40°C	-40°C	-50°C
Long term static max.	+120°C	+120°C	+135°C
Short term (3000 hrs)	+150°C	+135°C	+150°C
Short term (200 hrs)	+175°C	+150°C	+175°C
<b>Characteristics</b>			
UV resistance	■■■■■	■■■■■	■■■■■
Flexibility	■■■■□	■■■■■	■■■■■
Fatigue life	■■■■■	■■■■□	■■■■■
Ext. wear resistance	■■■■■	■■■■■	■■■■□
Self extinguishing	•	•	•
Halogen free	•	•	•
Low smoke toxicity	•	•	•
<b>Approvals</b>			
CE	•	•	•
UL94 V0	–	–	–
UL94 V2	–	–	•
UL94 HB	•	•	–
R118	•	–	–
RoHS Compliant	•	•	•
ADR Approved	•	–	–
(ELV) EU200/53/EC	•	•	•
<b>Chemical resistance*</b>			
IRM 903 (ASTM Oil No.2)	S	S	S
Diesel Oil	S	S	S
Ethylene Glycol (Anti-freeze)	S	S	S
Lubricating Oil	S	S	S
Methyl Alcohol	L	L	S
Parafin Oil	S	S	S
Petrol	S	S	S
Sodium Chloride	S	S	S
Sodium Hydroxide (10%)	S	S	S
Transformer Oil	S	S	S
Urea	S	S	NT
Vegetable Oil	S	S	S
Sea (Water)	S	S	S


Key: S = Suitable / L = Limited Suitability / U = Unsustainable / NT = Not Tested

Maximum Performance = ■■■■■

\*All chemicals tested for resistance at 23°C.

## NC Standard weight, polyamide 6

### General purpose conduit

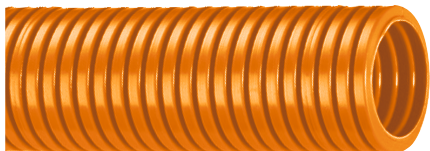

Solid



Slit

#### Description

Flexible standard weight nylon (PA6) conduit is a general-purpose conduit suitable for automotive harness applications. Able to withstand extremes of temperatures and resistant to automotive oils and solvents. It is extremely tough and has a very high impact strength and high fatigue life.

#### Applications

NC standard weight conduit is extensively used in harnesses on HGV and off road vehicle applications where a superior protection against impact and mechanical shock is preferred. The conduit is used for both chassis and engine applications and can be used in a wide range of temperatures. Polyamide 6 is highly resistant to all hydrocarbon based oils and fluids and many types of solvents.

#### NC Standard weight

#### Materials: Polyamide 6

Approvals	IP Rating	Appropriate fitting	Temperature range	UV resistance
ADR Approved (Sealed fittings)	IP40	Hinged fittings	Long term: -40°C to +120°C	Very high (Black)
UL94 HB rated	NC Slit (IP40 only)		Short term: +150°C	
CE Mark to the Low Voltage Directive	IP67	Sealed fittings	Fire performance	
RoHS Compliant to 2011/65/EU	IP68 (2 bar 30 mins)	Sealed fittings	Self extinguishing	
Reg 118	Degree of mechanical protection		Low smoke toxicity	
Conforms with End of Life Vehicle directive (ELV) EU200/53/EC	High flexibility & fatigue life		Halogen free	
	Very high abrasion, impact and shock resistance			
	Suited to high risk impact applications			



#### Dimensions

	Solid Part No.	Slit Part No.	Conduit size			Nominal O/D A (mm)	Min. bore B (mm)	Min. static bend radius C (mm)	Reel length (m)
			NC	NW	US				
	NC06	NC06-S	06	4.5	–	7.1	4.5	5.0	100
	NC08	NC08-S	08	7.5	¼	10.0	6.5	15.0	100
	NC10	NC10-S	10	8.5	¼	11.5	8.4	15.0	100
	NC12	NC12-S	12	10	⅝ <sub>16</sub>	13.0	9.9	20.0	100
	NC16	NC16-S	16	13	⅜	16.0	11.8	30.0	100
	NC20	NC20-S	20	17	½	21.2	16.6	35.0	50
	NC25	NC25-S	25	22	¾	25.6	21.3	40.0	50
	NC28	NC28-S	28	23	¾	28.5	22.6	45.0	50
	NC30	NC30-S	30	26	1	31.6	26.0	50.0	50
	NC32	NC32-S	32	29	1	34.5	28.8	55.0	50
	NC40	NC40-S	40	36	1 ¼	42.5	34.8	65.0	25
	NC50	NC50-S	50	48	1 ½	54.5	46.9	70.0	25

Colours available: Black ● RAL 9005 / Orange ● RAL 2003 / \*Other colour options available, subject strictly to MOQ.

To order quote part number & reel length, e.g. NC06/100m. For slit conduit options add -S to part number, e.g. NC06-S/100m.

For colours other than standard Black also add colour, i.e. /OR for Orange conduit, e.g. NC06/OR/100m.

Bulk coil lengths over 200m are also available.


Hilltop Products LTD, Unit A Parkside Business Park, Kirkstead Way, Golborne, WA3 3PY

t: +44 (0)1942 723101

e: sales@hilltop-products.co.uk

## CTPA Lightweight, polyamide 6

### Extra flexible conduit

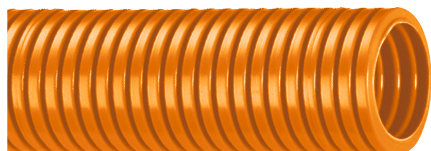

Solid



Slit

#### Description

Extra flexible lightweight nylon (PA6) conduit is a general-purpose conduit suitable for electrical loom applications. Able to withstand extremes of temperatures and resistant to automotive oils and solvents. It is extremely tough and has a medium impact strength and high fatigue life.

#### Applications

CTPA lightweight conduit is extensively used in general purpose, lightweight electrical loom applications. Polyamide 6 is highly resistant to all hydrocarbon based oils and fluids and many types of solvents.

#### CTPA Lightweight

#### Materials: Polyamide 6

Approvals	IP Rating	Appropriate fitting	Temperature range	UV resistance
CE Mark to the Low Voltage Directive	IP40	Hinged fitting	Long term: -40°C to +120°C	Very high (Black)
UL94 HB rated	IP67	Sealed fittings	Short term: +150°C	
RoHS Compliant to 2011/65/EU	<b>Degree of mechanical protection</b>		<b>Fire performance</b>	
Conforms with End of Life Vehicle directive (ELV) EU200/53/EC	High flexibility & fatigue life		Self extinguishing	
	Medium impact resistance - suited to lower impact risk applications		Low smoke toxicity	
			Halogen free	



#### Dimensions

	Solid Part No.	Slit Part No.	Conduit size			Nominal O/D A (mm)	Min. bore B (mm)	Min. static bend radius C (mm)	Reel length (m)
			NC	NW	US				
	CTPA08	CTPA08-S	08	7.5	¼	10.0	6.5	10.0	100
	CTPA10	CTPA10-S	10	8.5	¼	11.5	8.7	15.0	100
	CTPA12	CTPA12-S	12	10	⅝ <sub>16</sub>	13.0	10.1	20.0	100
	CTPA16	CTPA16-S	16	13	⅜	16.0	11.8	35.0	100
	CTPA20	CTPA20-S	20	17	½	21.2	16.9	45.0	50
	CTPA25	CTPA25-S	25	22	¾	25.6	21.3	45.0	50
	CTPA28	CTPA28-S	28	23	¾	28.5	23.1	45.0	50
	CTPA32	CTPA32-S	32	29	1	34.5	28.8	55.0	50
	CTPA40	CTPA40-S	40	36	1 ¼	42.5	35.0	65.0	25
	CTPA50	CTPA50-S	50	48	1 ½	54.5	46.0	90.0	25

Colours available: Black ● RAL 9005 / Orange ● RAL 2003 / \*Other colour options available, subject strictly to MOQ.


To order quote part number & reel length, e.g. CTPA08/100m. For slit conduit options add -S to part number, e.g. CTPA08-S/100m.

For colours other than standard Black also add colour, i.e. /OR for Orange conduit, e.g. CTPA08/OR/100m.

Bulk coil lengths over 200m are also available.

## CPC Medium weight, co-polyester

### Dynamic conduit

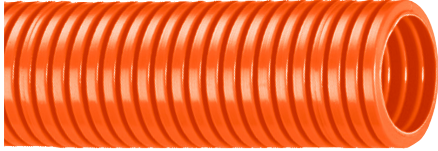

Solid

#### Description

Dynamic and extra flexible medium weight, co-polyester conduit suitable for automotive harness applications. Able to withstand extremes of temperatures and resistant to automotive oils and solvents. It is extremely tough and has a very high impact strength and fatigue life.

#### Applications

A low smoke, low toxicity conduit, CPC has excellent high and low temperature properties, making it ideal for harness applications such as engine, body section and chassis. CPC is resistant to hydrocarbons, greases, fuels and oils.

#### CPC Medium weight

Materials: FR Co-Polyester

Approvals	IP Rating	Appropriate fitting	Temperature range	UV resistance
CE Mark to the Low Voltage Directive	IP40	Hinged fitting	Long term: -50°C to +135°C	Very high
UL94 V2 rated	IP67	Sealed fittings	Short term: +175°C	
RoHS Compliant to 2011/65/EU	<b>Degree of mechanical protection</b>		<b>Fire performance</b>	
Conforms with End of Life Vehicle directive (ELV) EU200/53/EC	Very high flexibility & fatigue life		Self extinguishing	
	Very high abrasion, impact and shock resistance at low temperatures		Low smoke toxicity	
			Halogen free	



#### Dimensions

	Solid Part No.	Conduit size			Nominal O/D A (mm)	Min. bore B (mm)	Min. static bend radius C (mm)	Reel length (m)
		NC	NW	US				
	CPC08	08	7.5	¼	9.8	6.2	20.0	100
	CPC12	12	10	5/16	13.0	9.4	25.0	100
	CPC16	16	13	¾	16.0	11.0	30.0	50
	CPC20	20	17	½	21.2	16.1	40.0	50
	CPC25	25	22	¾	25.3	21.0	45.0	50
	CPC28	28	23	¾	28.5	22.5	45.0	50
	CPC32	32	29	1	34.5	27.2	55.0	50
	CPC40	40	36	1 ¼	42.5	34.2	60.0	25
	CPC50	50	48	1 ½	54.5	46.9	70.0	25

Colours available: Black ● RAL 9005 / Orange ● RAL 2017 / To order quote part number & reel length, e.g. CPC08/100m.  
For colours other than standard Black also add colour, i.e. /OR for Orange conduit, e.g. CPC08/OR/100m.

