


Vidaflex L124 - Braided "E" Glass Sleeving

Features and Benefits:

- Durable
- High Temperature
- Excellent Quality
- Sustainable Sleeve
- Sleek design
- Range of Applications
- High melting point
- RoHS compliant

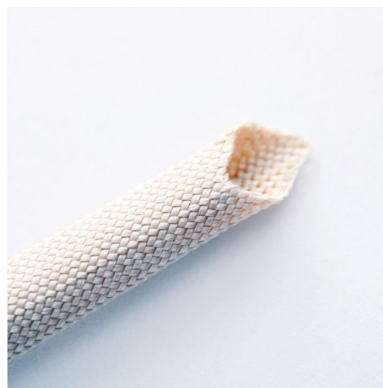

Specifications:

- **Colour** : Natural
- **Fibreglass Type** : E-Glass (Electrical Grade)
- **Fibreglass Filament Diameter** : 9 μ m
- **Temperature Rating** : 220°C
- **Temp Short Term** : 600°C
- **Melting Point** : 700

bore size (mm)	Min. wall thickness (mm)	Max. wall thickness
1	0.35	0.7
2	0.35	0.7
3	0.35	0.7
4	0.35	0.7
5	0.35	0.7
6	0.35	0.7
7	0.35	0.7
8	0.35	0.7
9	0.35	0.7
10	0.35	0.7
12	0.35	0.7
14	0.35	0.7
20	0.35	0.7
25	0.35	0.7



Vidaflex L124 - Braided "E" Glass Sleeving