

Product Technical Data

8700 - 8800 - 8900


Multifunction blowlamps

Product:	Cartridge blowlamp
Activity:	Multipurpose
User:	General public and Professionals
Energy:	Butane gas, 1.5 bar

Description


Knob for gas flow on/off and adjustment.
Steel bell jar for gas cartridge protection.
Locking plate.
Piezo ignition (Models 8800 and 8900 only).

Flame type: Sharp tip
Flame dimensions: Dia. 6 x 60 mm
Nozzle inner diameter: Dia. 16 mm
False flame length: 170 mm

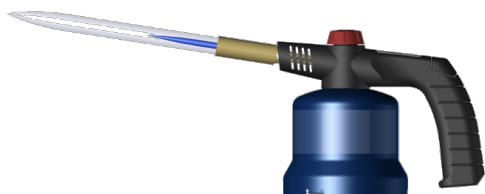

Application fields

Plumbing, brazing, stripping, loosening of bolts and nuts, burning, crèmes brûlées.

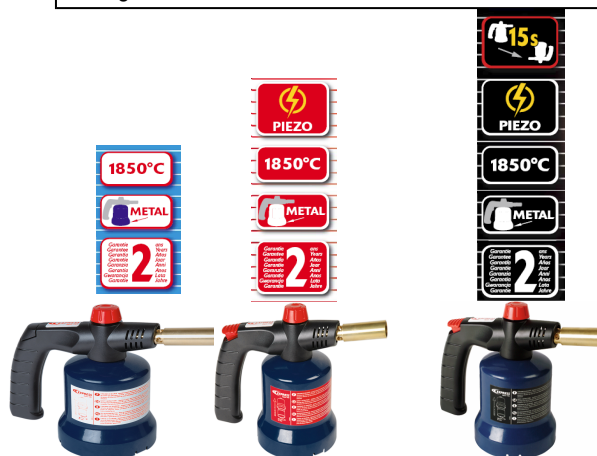

Functions

Ref.:	8700	8800	8900
Flame	Sharp tip	Sharp tip	Sharp tip
Gas flow on/off and adjustment (knob)	Yes	Yes	Yes
Flame adjustment (knob)	Yes	Yes	Yes
Piezo ignition (button)	No	Yes	Yes
Base (bell jar)	Yes	Yes	Yes
Shaking	1 min 30 sec	1 min 30 sec	10 sec
Working upside down	1 min 30 sec	1 min 30 sec	15 sec

Technical features

Flow (g/h) at 1.5 bar	110
Power (kW)	1.60
Autonomy (hours)	1h30
Flame temperature (°C) (approximately)	1850

Soldering capacity on copper tubes

	Dia. (mm)
Cu Ph	Dia. 14
Tin 40%	Dia. 14
Cu Ph 30% Ag	Dia. 16
Sn 97% Cu 3 %	Dia. 50

Packaging

	Weight (g)	Width (mm)	Depth (mm)	Height (mm)
Appliance packaged in "Cardboard box" - Ref. 8700	600	210	110	165
Appliance packaged in "Cardboard box" - Ref. 8800	600			
Appliance packaged in "Cardboard box" - Ref. 8900	600			
Over-packaging - Ref. 8700 (6 pieces)	3600	445	350	200
Over-packaging - Ref. 8800 (6 pieces)	3600			
Over-packaging - Ref. 8900 (6 pieces)	3600			